



1064nm High Power Optical Isolator

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS


- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Transmitters and Fiber Lasers
- CATV Networks

SPECIFICATIONS



Parameter	Unit	High Power Type
Center Wavelength (λ_c)	nm	1064
Operating Wavelength Range	nm	+/-10
Peak Isolation (Typ.)	dB	28
Min. Isolation (23°C)	dB	22
Typical Insertion Loss (λ_c , 23°C)	dB	1.2
Max. Insertion Loss (λ_c , 23°C)	dB	1.4
Optical Return Loss (Input/Output)	dB	50/50
Max. Polarization Dependent Loss @ 23°C	dB	0.15
Fiber Type	-	HI 1060 Fiber or 10/125um Fiber
Fiber Tensile Load	N	5
Maximum Optical Power (CW)	W	1, 2, 3, 5, 10, 15, 20
Operating Temperature	°C	0~50
Storage Temperature	°C	-20~75

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.5dB higher, RL is 5dB lower.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber (For example: 6/125um, 20/125um or 25/250um, etc.) are also available; Devices can only work in the core of Double Cladding (DC) Fiber.

PACKAGE DIMENSION

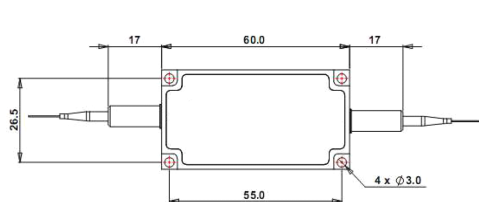

1~10W Average Power Package

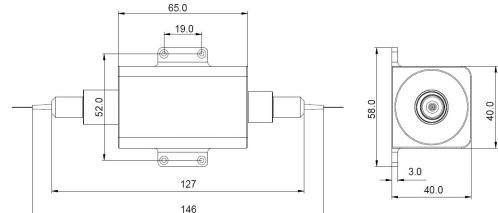

>10W Average Power Package

ORDERING INFORMATION

FISO- NNNN	-HP NN	- (C)	C	NN	- CC/CCC
Center Wavelength	Optical Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1064=1064nm	3=3W	E=10/125 Fiber	L= 900um Loose Tube	10=1.0m	N =Without Connector
	10=10W	O=10/125DC Fiber	3= 3mm Cable	15=1.5m	FC/APC=FC/APC Connector
	20=20W	Blank for HI1060 Fiber		20=2.0m	LC/PC =LC/PC Connector