

## 2×1 Multi-Mode Pump Combiner (MPC)

### Description


This 2×1 multi-mode fiber combiner is designed for high power fiber laser application. It combines two pump lasers into one multi-mode output fiber. Fiber type can be customized.

### Key Features

- High Pump Efficiency
- Wavelength Insensitive
- Custom Configurations Available

### Mechanical Dimension

**C4: 70x12x8**

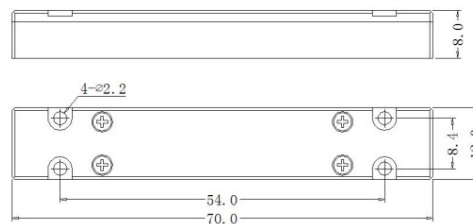

**Unit: mm**

## Specifications

Parameters/Test conditions		Min	Typ.	Max	Unit	Note
1	Pump Operating Wavelength	800		1000	nm	
2	Pump Fiber	Core Diameter		105	μm	Refer to fiber codes
3		Cladding Diameter		125	μm	
4		Numerical Aperture	0.15		-	
5	Output Fiber	105/125 0.22NA				Refer to fiber codes
6	Pump Efficiency	90			%	
7	Fiber Length	0.8			m	Each port
8	Power Handling			25	W	Each port
9	Operating Environment Temperature	-5		+70	°C	
10	Operating Humidity	5		95	%RH	
11	Storage Temperature	-40		+85	°C	
12	Package	C4			-	

## Ordering Information

MPC-2×1- Pump wavelength/Pump power- Pump fiber -Output fiber-Package-Fiber length

### Note :

Pump/Output fiber: refer to fiber codes.

Package: C4