

## Applications

- Fiber optical sensing
- Optical tomography
- DWDM component characterization
- Optical gyroscope




## Description

Amonics' ALS-CWDM Super-Wideband light source provides high spectral density, at above -30dBm/nm, across 1250nm to 1650nm. That makes this source the ideal tool for the characterization of CWDM components and communication links in one easy step. This broadband source is also extremely effective in high resolution optical coherent tomography(OCT) applications. In the benchtop unit, the output power, alarms and driving current values are shown on the LCD display. Output power can be adjusted by tuning the front panel control knob. Also active emission button is used to enhance operation safety.

## Key Features

- Wide spectral range 400nm
- High output power
- Good spectral stability
- Compact size
- Good performance cost ratio
- Two year warranty

--- LED Test			
Peak.....	1440.4nm	-10.52dBm	FWHM(2.35σ) ... 246.553nm
Mean W1 (10dB) .	1448.0nm		Pk Dens(1nm) .. -10.92dBm
Mean W1 (FWHM) .	1464.45nm		Total Power... 11.13dBm
10dB Width....	387.2nm		

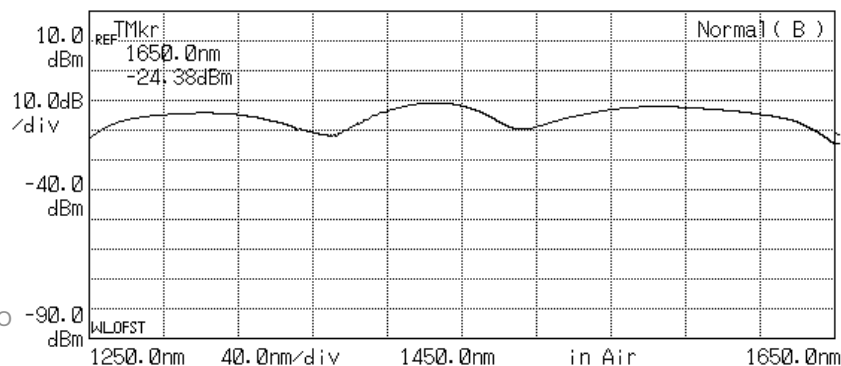

**Specifications**

ALS-CWDM	
Output Power	Min. 10mW
Spectral Range	1250nm to 1650nm
Min. Spectral Density	-30dBm/nm
Output Stability	< + / -0.02dB (over 8 hrs), < + / -0.005dB (over 5 mins)

**General Environmental Parameters**

Parameter	Unit	Benchtop	Module
Operation Temperature Range	°C	0 to +40	0 to +60
Storage Temperature Range	°C	-10 to +70	-10 to +70
Power Supply	V	90 – 240VAC, 47 - 63Hz	5.0 VDC
Dimensions	mm	260(W) x 330(L) x 120(H)	156(W) x 210(L) x 32(H)
Electrical Connector	-	NA	14-Pin MIL Socket
Protection	-	SLD over heat warning	SLD over heat warning
LCD Display	-	SLD Driving Current (mA)	NA
Control	-	Keylock switch, output power	NA
Computer Interface	-	RS232 / Ethernet	NA
Optical Connector	-	FC/APC, SC/APC	
Optical Fiber	-	Single mode fiber	

**Option:**

- Output Isolation
- Benchtop or 19" Rackmount Housing



**Ordering Information**

Product Code	ASLD-CWDM-5-a-bb	a: M for module, B for Benchtop bb: FA for FC/APC, FC for FC/UPC SA for SC/APC, SC for SC/UPC
--------------	------------------	-----------------------------------------------------------------------------------------------------

Amonics undertakes a continuous and intensive product development to ensure its products perform to highest technical standards As a result, the specifications in this document are subject to change without notice.

Amonics Limited. 14/F, Lee King Industrial Building, 12 Ng Fong Street, San Po Kong, Kowloon, Hong Kong

Beijing Amonics Co. Ltd. Room 902, Unit 1, NO.99 Chaoyang North Road, Beijing China 100025

contact@amonics.com www.amonics.com HK Tel: +852 2428 9723 HK Fax: +852 2428 9704 Beijing Tel: +86 10 84783386 Beijing Fax: +86 10 84783396